

eBOX635-881-FL

Fanless Embedded System with LGA1150 Socket 4th Gen Intel® Core™ i7/i5/i3 & Celeron® Processor, Intel® H81, 2 HDMI/VGA/ DisplayPort, 2 GbE LANs, USB 3.0, CFast™ and PCI Express Mini Card

Features

- LGA1150 socket 4th gen Intel® Core™ i7/i5/i3 & Celeron® processors (Haswell/ Haswell-Refresh)
- Intel® H81 chipset
- 204-pin DDR3-1333/1600 SO-DIMM, up to 8GB
- One 2.5" 15 mm SATA drive bay and 1 CFast™ slot
- 2 internal PCI Express Mini Card slots, 1 SIM slot
- 2 HDMI, VGA and DisplayPort with dual independent displays (H81) or triple independent displays (Q87) supported
- Jumbo Frame (9.5k), WoL, PXE Remote Boot, Teaming supported



Specifications


Standard Color	Silver-Black
Construction	Aluminum extrusion and heavy-duty steel, IP40
CPU	LGA1150 socket 4th generation Intel® Core™ i7/i5/i3 & Celeron® processor (CPU TDP max. up to 45 W)
System Memory	1 x 204-pin DDR3-1333/1600MHz SO-DIMM, up to 8GB
Chipset	Intel® H81
BIOS	AMI
System I/O Outlet	6 x RS-232/422/485 2 x HDMI 1 x VGA 1 x DisplayPort 1 x Audio (Mic-in/Line-out) 2 x 10/100/1000 Mbps Ethernet (Intel® i210-AT, i217-LM) 2 x USB 3.0 4 x USB 2.0 16 x DI/DO (8 IN & 8 OUT) 3 x SMA type connector opening for antenna 1 x VDC 19/12 VDC power input connector 1 x ATX power switch with status indicator
Watchdog Timer	255 levels, 1 ~ 255 sec.
Storage	1 x 2.5" 15 mm SATA HDD drive bay 1 x CFast™ slot
Expansion Interface	1 x full-size PCI Express Mini Card slot (USB and PCI Express signal) 1 x half-size PCI Express Mini Card slot (USB and PCI Express signal) 1 x SIM slot
TPM	N/A
System Indicator	1 x orange LED for HDD active 1 x orange/blue LED for system status (in ATX switch)
Power Supply	Input: AC 90-264V, AC 150 W Output: DC 19V @ 7.89A or Input: AC 90-264V, AC 102 W Output: DC 12V @ 8.5A
Operating Temperature	-20°C ~ +50°C (-4°F ~ 122°F) (with W.T. SSD, CPU TDP 35/45 W)
Humidity	10% ~ 90% , non-condensing
Vibration Endurance	3 Grms with CFast™ (5 - 500Hz, X, Y, Z directions)
Dimensions	280 mm (11.02") (W) x 150 mm (5.91") (D) x 76 mm (2.99") (H)
Weight (net/gross)	2.5 kg (5.51 lb)/ 4.5 kg (9.92 lb)
Certificate	CE, EN60950 compliance
EOS Support	WE8S, WES7, Linux

Packing List

- 1 x Quick manual
- 1 x Driver cd
- 1 x Screw pack
- 4 x foot pad
- 1 x Power cord
- 1 x Adapter

Updated May, 02, 2018.

* All specifications and photos are subject to change without notice.

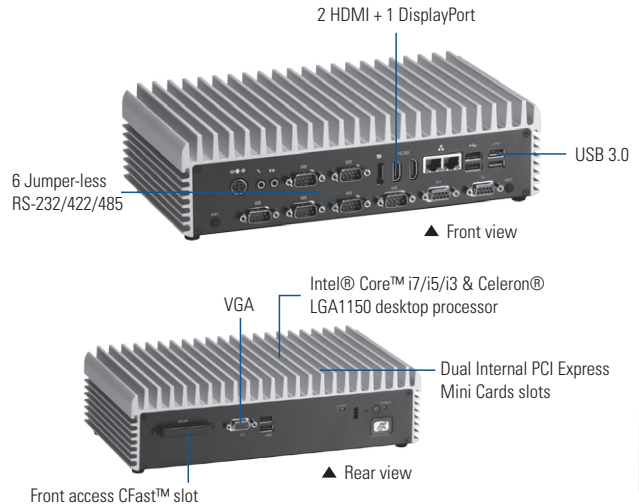

Power Protection

AC Version

- OVP (over voltage protection)
- OCV (over current protection)
- SCP (short circuit protection)

Ordering Information

Standard

eBOX635-881-FL	Fanless embedded system with LGA1150 socket 4th generation Intel® i7/i5/i3 & Celeron® processor, 2 HDMI, VGA, DisplayPort, 2 GbE LANs, 2 USB 3.0, 6 COM ports and 19/12 VDC adapter
----------------	---

Optional

2.5" SATA HDD	80GB or above
2.5" SATA SSD	40GB or above
DDR3 SO-DIMM	1GB ~ 8GB
CFast™	512MB or above
Wi-Fi module	
3G module	
GPS module	
Wall mount kit	8816K635010E
DIN-rail kit	8816K671030E
Power cord	

*Specifications and certifications may vary according to various options.

Dimensions

