

# T(P)ES-0016

16 10/100TX w/8/16 PoE at/af EN50155 Ethernet Switch; 24V model

- EN50155 / 61373 / 45545-2 verification
- IEEE802.3at/af up to 30W PoE output (For PoE model)
- Dual power input 9~36V (24V model) compliant with ISO 7637-2
- Wide Operating Temperature from -40°C to 75°C
- IP54 Aluminum housing for best heat dissipation and preventing moist ingress
- E-mark\* certificate for vehicle
- ITxPT\*\* design w/ ignition function (-IGN model)



## OVERVIEW

Lantech T(P)ES-0016 is a 16 10/100Base-TX w/8/16 port 802.3at/af PoE ports with M12-connectors unmanaged EN50155 Ethernet switch with IP54 rated protection which meets the high reliability requirements demanded by industrial rolling stock applications.

### **E-marking\* certificate; ISO 7637-2 compliant and extended working temperature**

The T(P)ES-0016 is designed to meet with critical network environment with IP54 enclosure and M12 connectors for protection against dust and water. It has passed harsh environmental testing to comply with Industrial EMI and Safety standards as well as stability testing such as Free fall, Shock, and vibration. It is compliant with ISO 7637-2 which protects switch from being damaged by high voltage that could be found at vehicle cranky start.

For a greater flexibility in application the T(P)ES-0016 supports an extended operating temperature range from -40°C to 75°C.

The E-marking\* certificate makes it the most suitable switch for bus, carriage, other vehicles application as well as for industrial areas where the power source is limited with 12V or 24V but has demand of IP surveillance or VoIP applications.

### **EN50155, EN45545-2, EN61373 verification; High ESD protection**

Lantech T(P)ES-0016 features high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in factory, substation, steel automation, aviation, mining and process control. It is the best solution for Automation, transportation, surveillance, Wireless backhaul, Semi-conductor factory and assembly lines.


### **ITxPT\*\* design with Ignition function using software**

T(P)ES-0016 is designed with ITxPT public transport standards and also compliant with ISO 7637-2 which protects switch from being damaged by high voltage that could be found at vehicle cranky start. (-IGN model)

## FEATURES & BENEFITS

- 16 10/100TX Unmanaged EN50155 Ethernet Switch with M12 connectors and IP54 rated protection
- Supports IEEE802.3at/af feeding power up to 30W per PoE port
- Back-plane (Switching Fabric): 3.2 Gbps
- 8K MAC address table
- Wide Operating Temperature (-40°C ~75°C)
- Din rail\*\* and wall mount design
- EN45545-2 Fire & Smoke, EN50155 and EN61373 shock/vibration verification
- E-mark\* certificate for vehicle
- ITxPT\*\* design w/ ignition function (-IGN model)

**DIMENSIONS (unit=mm)**

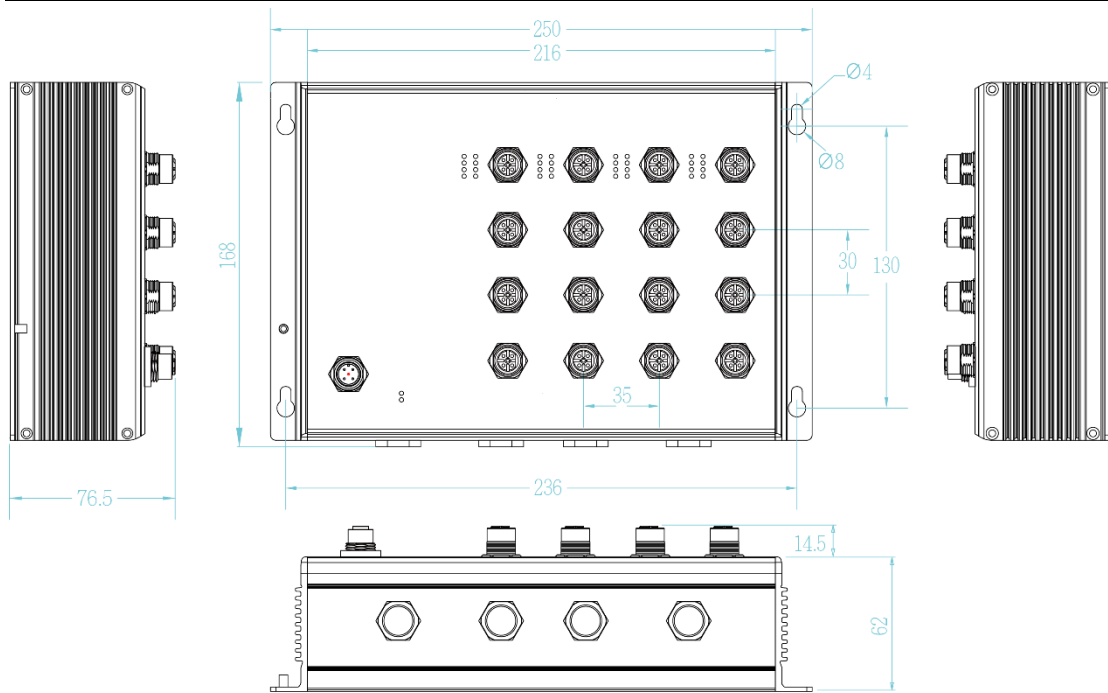

\*Note: The component in red color only appears on -H51 models.

**SPECIFICATIONS**

Hardware Specification		Consumption	
IEEE Standard	IEEE802.3 10BASE-T Ethernet IEEE802.3u 100BASE-T Ethernet IEEE802.3x Flow Control and Back Pressure IEEE802.3at/af Power over Ethernet (For PoE model)	Power Budget	Max. 80W Higher PoE budget can be applied upon request. **
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port	Operating Humidity	5% to 95% (Non-condensing)
Mac Address	8K MAC address table	Operating Temperature	-40°C ~ 75°C (-40°F ~ 167°F)
Connector	10/100TX: 16 x M12, 4-pole D-coded, Female with auto MDI/MDI-X function Power connector: 1 x M12, 4-pole A-coded, Male; 1 x M12, 5-pole A-coded, Male (IGN models)	Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
		Case Dimension	Aluminum case, IP54 250mm(W)x168mm(H)x76.5mm(D)
LED	Per unit: Power 1 (Green), Power 2 (Green), Ethernet: Link/Activity (Green) PoE: (Green)	Weight	1.8kg
PoE pin assignment	M12 port # 1~ # 12 support IEEE 802.3at/af Endpoint. Per port provides up to 30W	Installation	Wall Mount Design
		EMC	FCC Class A, CE EN55011, CE EN61000-4-2 (ESD), CE EN61000-4-3 (RS), CE EN61000-4-4 (EFT), CE EN61000-4-5 (Surge), CE EN61000-4-6 (CS), CE EN61000-4-8 (Magnetic Field), CE EN61000-6-2, CE EN61000-6-4, CE EN55032, CE EN55035, BS EN61000-4-2, BS EN61000-4-3, BS EN61000-4-4, BS EN61000-4-5, BS EN61000-4-6, BS EN61000-4-8, BS EN55032, BS EN55035
Power Supply	Dual input 9~36VDC (24 model)	Stability Testing	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)
Power	Max. 3.32W	Verifications & Report	EN50155/EN50121-3-2/EN50121-4 verification EN45545-2 R13/R22/R23/R24/R25 (EN ISO 4589-2,

	EN ISO 5659-2, NF X70-100-1 & 2) Fire & Smoke verification		TES-0016T : 992,380 hours (standards: IEC 62380)
Vehicle certificate	E13 marking* ITxPT design** (-IGN model)	Warranty	5 years
MTBF	TPES-0016T : 886,325 hours		

\*Future Release  
\*\*Optional

## ORDERING INFORMATION

All model packages include M12 caps and wall mount bracket. All standard models are non-coating, optional coating models are available with -C model names.

- **TPES-0016-8-54-24V-IGN.....P/N: 8360-56684**  
16 10/100TX IP54 rated w/8 port PoE at/af EN50155 Unmanaged Ethernet Switch w/M12 connectors; -40°C to 75°C; 9~36VDC dual input; w/ignition
- **TPES-0016-16-54-24V-IGN.....P/N: 8360-56685**  
16 10/100TX IP54 rated w/16 port PoE at/af EN50155 Unmanaged Ethernet Switch w/M12 connectors; -40°C to 75°C; 9~36VDC dual input; w/ignition
- **TPES-0016-8-54-24V.....P/N: 8360-5668**  
16 10/100TX IP54 rated w/8 port PoE at/af EN50155 Unmanaged Ethernet Switch w/M12 connectors; -40°C to 75°C; 9~36VDC dual input
- **TPES-0016-16-54-24V.....P/N: 8360-56681**  
16 10/100TX IP54 rated w/16 port PoE at/af EN50155 Unmanaged Ethernet Switch w/M12 connectors; -40°C to 75°C; 9~36VDC dual input
- **TES-0016-54-24V-IGN.....P/N: 8360-56692**  
16 10/100TX IP54 rated EN50155 Unmanaged Ethernet Switch w/M12 connectors; -40°C to 75°C; 9~36VDC dual input; w/ignition
- **TES-0016-54-24V.....P/N: 8360-5669**  
16 10/100TX IP54 rated EN50155 Unmanaged Ethernet Switch w/M12 connectors; -40°C to 75°C; 9~36VDC dual input

## OPTIONAL ACCESSORIES

### M12 Connector & Cable

#### Connector

- **ECON120005PF** 5 pin M12 (Female) A-coded 180 degree crimp type connector for power supply
- **ECONM12-04D(M)-C-180** 4 pin M12 (Male) D-coded 180 degree crimp type connector for data

#### Cable

- **ECONM12-5P(F)70CM CABLE** 5 pin M12 (Female) A-coded 90 degree cable for power supply, 70cm
- **ECAM124030MJS** 4 pin M12 (Male) D-coded 180 degree RJ45 STP cable for data, 300cm

### Lantech Communications Global Inc.

www.lantechcom.tw  
info@lantechcom.tw

© 2022 Copyright Lantech Communications Global Inc. all rights reserved.  
The revise authority rights of product specifications belong to Lantech Communications Global Inc.  
Lantech may make changes to specification and product descriptions at anytime, without notice.