

T(P)GS-0008CB

8 10/100/1000T (PoE at/af) EN50155 Ethernet Switch

- IEEE802.3at/af up to 30W PoE output (for PoE model)
- Dual power inputs 9~36V (24VI model) or 16.8~56V (24TVI model); with galvanic isolation between input power, PoE (for PoE model) and all Ethernet ports
- Wide Operating Temperature from -40°C to 75°C
- Efficient PoE configuration when ignition off (-IGN model)
- Inrush current prevention; polarity reverse protection
- IP54 Aluminum housing for best heat dissipation and preventing moist ingress
- EN50155/50121-3-2/50121-4 and EN45545-2 Fire & Smoke verification
- E-mark* certificate for vehicle (24VI model)
- ITxPT* labeled w/ignition function (24VI-IGN model)



OVERVIEW

Lantech T(P)GS-0008CB is an 8 10/100/1000 Base-T with M12-connectors EN50155 unmanaged Ethernet switch with IP54 rated protection which meets the high-reliability requirements demanded by industrial rolling stock applications.

Redundant dual 24VI/24TVI input with max PoE budget; inrush current prevention and polarity reverse protection

The T(P)GS-0008CB 24VI model accepts 9~36VDC dual input and 24TVI model accepts 16.8~56VDC with galvanic isolation to PoE and all Ethernet ports. PoE feeding with 80W budget from internal power. The redundant power input design prevents inrush current and safeguards against polarity reversal.

E-marking* certificate, ITxPT*; ISO 7637-2 compliant and extended working temperature

The T(P)GS-0008CB is designed to meet with critical network environment with IP54 enclosure and M12 connectors for protection against dust and water. It has passed harsh environmental testing to comply with Industrial EMI and Safety standards as well as stability testing such as Free fall, Shock,

and vibration. It is labeled with ITxPT* public transport standards and also compliant with ISO 7637-2 which protects switch from being damaged by high voltage that could be found at vehicle cranky start.

For greater flexibility in application the T(P)GS-0008CB supports an extended operating temperature range from -40°C to 75°C.

Efficient PoE configuration when ignition off

Supports optional PoE feeding OFF timer (1/5/10mins or others) at ignition off mode to prevent car battery drain-out. (-IGN model)

The E-marking* certificate makes it the most suitable switch for bus, carriage, other vehicle applications as well as for industrial areas where the power source is limited with 12V or 24V but has demand of IP surveillance or VoIP applications.


※The optional PoE off-timer is available after February 23, 2024.

FEATURES & BENEFITS

- 8 10/100/1000T Unmanaged EN50155 Ethernet Switch with M12 connectors and IP54 rated protection
- Supports IEEE802.3at/af feeding power up to 30W per PoE port (for PoE model), total PoE budget 80W
- Back-plane (Switching Fabric): 16 Gbps
- 8K MAC address table
- Wide Operating Temperature (-40°C ~75°C)
- Din rail** and wall mount design

- E-mark* certificate for vehicle (24VI model)
- EN50155/50121-3-2/50121-4 and EN45545-2 Fire & Smoke verification
- Inrush current prevention; polarity reverse protection
- ITxPT* labeled w/ ignition function (24VI-IGN model)

DIMENSIONS (unit=mm)

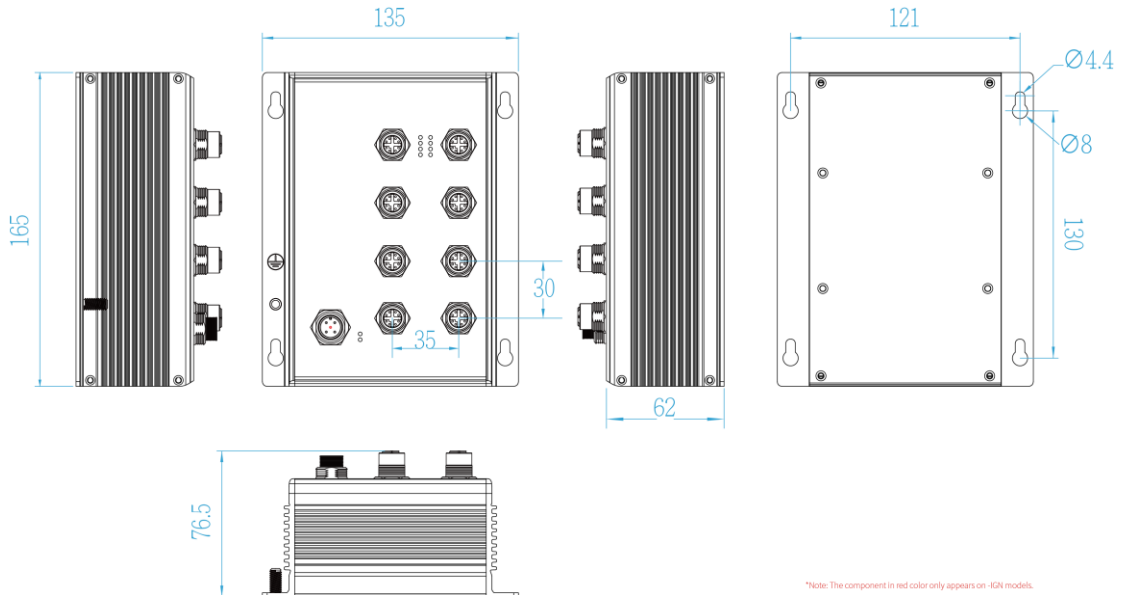

SPECIFICATIONS

| Hardware Specification | | 10/100/1000T | |
|------------------------|---|-----------------------|---|
| IEEE Standard | IEEE802.3 10BASE-T Ethernet IEEE802.3u 100BASE-T Ethernet IEEE802.3ab 1000Base-T IEEE802.3x Flow Control and Back Pressure IEEE802.3at/af Power over Ethernet (For PoE Model) | | 1:TXD1+ 5:TXD4+ 2:TXD1- 6:TXD4- 3:RXD2+ 7:RXD3+ 4:RXD2- 8:RXD3- |
| Transfer Rate | 14,880pps for Ethernet port 148,800pps for Fast Ethernet port | Power Supply | Dual input 9~36VDC (24VI model) 16.8~56VDC (24TVI model) |
| Mac Address | 8K MAC address table | Power | 4.5W without PoE |
| Connector | 10/100/1000T: 8 x M12, 8-pole X-coded, Female with auto MDI/MDI-X function Power connector: 1 x M12, 4-pole A coded, Male 1 x M12, 5-pole A-coded, Male (-IGN model) | Consumption | |
| | | Power Budget | Total 80W @ 24VDC and above |
| Rotary Switch | Rotary switch for delay time configuration (-24VI-IGN model) | Operating Humidity | 5% to 95% (Non-condensing) |
| LED | Per unit: Power 1 (Green), Power 2 (Green), Ethernet: Link/Activity (Green) PoE: (Green) | Operating Temperature | -40°C ~ 75°C (-40°F ~ 167°F) |
| PoE pin assignment | M12 port # 1~ # 8 support IEEE 802.3at/af End-point. Per port provides up to 30W | Storage Temperature | -40°C ~ 85°C (-40°F ~ 185°F) |
| | | Case Dimension | Aluminum case, IP54 rated 135mm(W)x165mm(H)x76.5mm(D) |
| | | Weight | 700g |
| | | Installation | Wall Mount Design |
| | | EMC | FCC Part 15, Subpart B ICES-003 Issue 7, EN 55035:2017/A11:2020, EN 55032:2015/A11:2020, IEC 61000-4-2:2008, IEC 61000-4-3:2020, IEC 61000-4-4:2012, IEC 61000-4-5:2014+AMD1:2017 CSV, IEC 61000-4-6:2023, IEC 61000-4-8:2009, IEC 61000-6-2:2016, |

| | | | |
|------------------------|--|---------------------|--|
| | IEC 61000-6-4:2018, EN IEC 61000-6-2:2019, EN IEC 61000-6-4:2019, BS EN 55035:2017+A11:2020, BS EN 55032:2015+A11:2020 | | EN 50124-1:2017, EN 45545-1, EN 45545-2 Fire & Smoke verification |
| Stability Testing | EN 61373:2010 (Shock and Vibration) | Vehicle certificate | E24 marking* (24VI model) ITxPT* labeled (24VI-IGN model) |
| Verifications & Report | EN 50155:2021, EN 50121-4:2016/A1:2019, EN 50121-3-2:2016/A1:2019, | MTBF | TBC |
| | | Warranty | 5 years |

*Future release
**Optional

ORDERING INFORMATION

All model packages include M12 caps and wall mount bracket. All standard models are non-coating, optional coating models are available with -C model name.

- **TPGS-0008CB-54-24VI.....P/N: 8351-1463**
8 10/100/1000T IP54 rated PoE at/af Ethernet Switch w/M12 connectors; -40°C to 75°C; 9~36VDC dual input; E-marking certified ; w/ PoE galvanic isolation
- **TPGS-0008CB-54-24TVI.....P/N: 8351-1464**
8 10/100/1000T IP54 rated EN50155 PoE at/af Ethernet Switch w/M12 connectors; -40°C to 75°C; 16.8~56VDC dual input ; w/ PoE galvanic isolation
- **TPGS-0008CB-54-24VI-IGN.....P/N: 8351-1465**
8 10/100/1000T IP54 rated EN50155 PoE at/af Ethernet Switch w/M12 connectors; -40°C to 75°C; 9~36VDC dual input; E-marking and ITxPT certified w/ignition ; w/ PoE galvanic isolation
- **TGS-0008CB-54-24VI.....P/N: 8351-1469**
8 10/100/1000T IP54 rated Ethernet Switch w/M12 connectors; -40°C to 75°C; 9~36VDC dual input; E-marking certified ; w/ galvanic isolation
- **TGS-0008CB-54-24TVI.....P/N: 8351-147**
8 10/100/1000T IP54 rated EN50155 Ethernet Switch w/M12 connectors; -40°C to 75°C; 16.8~56VDC dual input ; w/ galvanic isolation
- **TGS-0008CB-54-24VI-IGN.....P/N: 8351-1471**
8 10/100/1000T IP54 rated EN50155 Ethernet Switch w/M12 connectors; -40°C to 75°C; 9~36VDC dual input; E-marking and ITxPT certified w/ignition; w/ galvanic isolation

OPTIONAL ACCESSORIES

M12 Connector & Cable

Connector

- **ECON120005PF** 5 pin M12 (Female) A-coded 180 degree crimp type connector for power supply
- **ECONM12-04A(F)-C-180** 4 pin M12 (Female) A-coded 180 degree crimp type connector for power supply
- **ECONM12-04D(M)-C-180** 4 pin M12 (Male) D-coded 180 degree crimp type connector for data

Cable

- **ECONM12-5P(F)70CM CABLE** 5 pin M12 (Female) A-coded 90 degree cable for power supply, 70cm
- **ECONM12-4P(F)1.5M CABLE** 4 pin M12 (Female) A-coded 90 degree cable for power supply, 150cm
- **ECAB124030MJS** 4 pin M12 (Male) D-coded 180 degree RJ45 STP cable for data, 300cm
- **ECONM12-05A(F) to MCP 6P-20CM CABLE** 5 pin M12 (Female) A-coded 180 degree to 6 pin MCP power cable, 20cm (For ignition models)

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2024 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.